

PL1/IB 04 / 03800

(20.12.04)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

IB/04/3800

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 22 November 2004

BEST AVAILABLE COPY

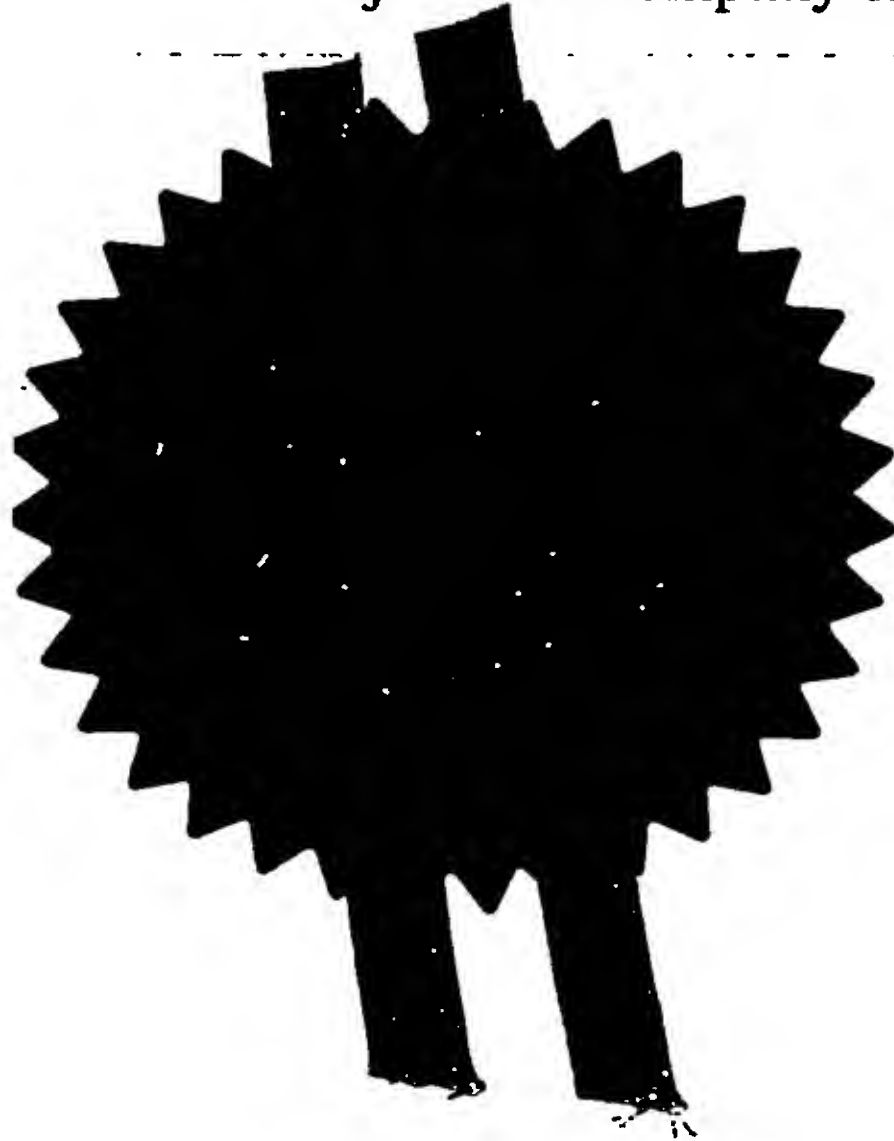



ZIMV03 0853872-3 000192
P01/7700 0.00-0327065.9

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

N.90444 NP

2. Patent application number

(The Patent Office will fill this part in)

0327065.9 ✓

20 NOV 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

INTIER AUTOMOTIVE INTERIORS LTD.
Bircholtz Road
Maidstone, Kent ME15 9XT
United Kingdom

Patents ADP number (if you know it)

8442527002
GB

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

APPARATUS AND METHOD FOR POSITIONING
REINFORCEMENT MATERIAL WITHIN AN INTERIOR
TRIM PANEL

5. Name of your agent (if you have one)

J. A. KEMP & CO.

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

14 South Square
Gray's Inn
London
WC1R 5JJ

Patents ADP number (if you know it)

26001 TA

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note d)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

~~No~~ Yes

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form -

Description 11

Claim(s) 2

Abstract 1

Drawing(s) 4

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for a preliminary examination and search (Patents Form 9/77) 1

Request for a substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

J.A. KEMP & CO.

Date 20 November 2003

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom


N J K PRICE
020 7405 3292

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes


- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

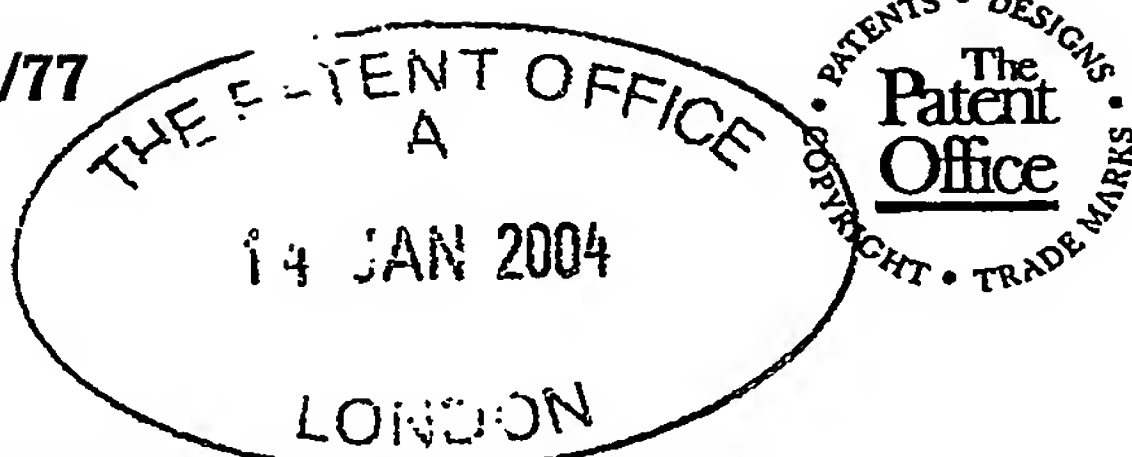

15JAN04 B152848-1 D00192
P07/7700 0.00-0327065.9 NONE
The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Statement of inventorship and of right to grant of a patent

| | |
|--|---|
| 1. Your reference | N.90444 NP |
| 2. Patent application number (If you know it) | 0327065.9 |
| 3. Full name of the or of each applicant | INTIER AUTOMOTIVE INTERIORS LTD. |
| 4. Title of the invention | APPARATUS AND METHOD FOR POSITIONING REINFORCEMENT METERIAL WITHIN AN INTERIOR TRIM PANEL |
| 5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent | By virtue of an assignment dated 8 December 2003 |
| 6. How many, if any, additional Patents Forms 7/77 are attached to this form? (see note (c)) | |
| 7. | I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to. Signature  Date 13 December 2003 J.A. KEMP & CO. |
| 8. Name and daytime telephone number of person to contact in the United Kingdom | N J K PRICE 020 7405 3292 |

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

DEEKS, Alan Robert
283 Front Lane
Upminster
Essex RM14 1LH
United Kingdom

Patents ADP number *(if you know it)*:

087 90610001

Patents ADP number *(if you know it)*:

Patents ADP number *(if you know it)*:

Reminder

Have you signed the form?

APPARATUS AND METHOD FOR POSITIONING REINFORCEMENT MATERIAL WITHIN AN INTERIOR TRIM PANEL

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The invention relates in general to molding of a trim component, and in particular, to an apparatus and method for consistently and accurately positioning a reinforcement material, such as a scrim material, within a layer of material of an interior trim panel.

Description of the Related Art

[0002] Inflatable restraint systems that protect passengers are located in trim panels, such as instrument panels, in front or to the side of passengers in a vehicle. Typically, the inflatable restraint system includes an air bag that is enclosed within a storage receptacle, which is typically mounted behind an interior trim piece, such as a steering wheel cover in the case of the driver's side air bag, or a section of the instrument panel, in the case of the passenger's side air bag. In some vehicles, side impact air bags are also provided in some or all of the vehicle doors.

[0003] One or more air bag deployment doors normally overlie the air bag receptacle and are forced open when the air bag is inflated to allow deployment of the air bag through the opening created by the door panel movement. However, automotive interior trim substrates and covering materials, such as plastics, are relatively tough and difficult to sever. Thus, a predetermined severing pattern may be necessary for proper opening of the airbag door in the trim panel.

[0004] One mechanism for insuring proper opening of the trim cover in an "invisible seam" installation in which the deployment airbag door pattern is totally invisible to a person seated in the vehicle is by performing a secondary operation, such as laser cutting or scoring, to preweaken the trim cover. However, laser scoring of the trim cover from the inside, if not done accurately, can over time become at least faintly visible causing "witness lines" from the exterior of the trim piece. Thus, fabrication of the automotive interior trim pieces, particularly for invisible seam applications, is thus a difficult manufacturing challenge.

[0005] To achieve a high level of capability required to manufacture safety critical items, such as integrated invisible airbag doors in instrument panels or the like, it is necessary to demonstrate repeatability of all steps of the process. In addition, to achieve the opening of an airbag door at a range of temperatures without fragmentation, it is desirable to reinforce the airbag door area with a mesh, fabric, scrim, or other type of reinforcement material, which may also provide a hinge or tether when the door opens with the force of the airbag deployment. Typically, the trim component, such as an instrument panel, is comprised of carrier layer or substrate; an optional layer of foam material, and a cover material visible to the occupant.

[0006] In order to demonstrate the repeatability of the process steps, it must be shown that the reinforcement material can be encapsulated consistently in the desired position from one manufactured trim component to the next manufactured trim component during the molding process. In the manufacture of an instrument panel, for example, an inaccuracy of the placement of the reinforcement material may result in the reinforcement material not to be positioned immediately adjacent to the desired preweakening of the substrate or trim covering material. In addition, the reinforcement material may migrate within the substrate toward an exterior surface during the molding process, thereby increasing the probability of "read-through" of the reinforcement material.

[0007] One current method of positioning the reinforcement material is to utilize pins within the instrument panel substrate molding tool that will accept punched holes in the reinforcement material. One problem with this method is that all of the surface shapes required by the instrument panel stylist are difficult to accommodate. In addition, this method only positions the reinforcement material accurately in one plane, and only at the positions of the punched holes, thereby allowing the injected material to distort the reinforcement material at other locations.

[0008] Thus, there is a need to provide a method for positioning a reinforcement material, such as a scrim material or the like, consistently in three dimensions within a trim component, such as an instrument panel, during an injection molding process. There is also a need to position the reinforcement material within the substrate

material in such a way that secondary operations, such as laser scoring, can be eliminated by the use of alternative methods to promote tearing of the foam and/or covering materials.

SUMMARY OF THE INVENTION

[0009] The inventor of the present invention has recognized these and other problems associated with manufacturing a trim component having a reinforcement material and has developed a method and apparatus for alleviating such problems. Specifically, the inventor of the present invention has developed a cassette comprising a frame member and a reinforcement material held in place by the frame member such that the reinforcement material is positioned at a predetermined location within a mold tool.

[0010] The inventor has also developed a method for positioning a reinforcement material comprising the steps of providing a cassette including a frame member, and securing a reinforcement material to the frame member such that the reinforcement material is positioned at a predetermined location within a mold tool.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] In the drawings:

[0012] Figure 1 shows a top view of a cassette for positioning a reinforcement material according to an embodiment of the invention.

[0013] Figure 2 shows a cross sectional view of an embodiment of the cassette taken along line 2-2 of Figure 1.

[0014] Figure 3 shows an enlarged view of an alternate embodiment of the frame member illustrating the reinforcement material being encapsulated by the frame member of the cassette.

[0015] Figure 4 shows another enlarged view of another alternate embodiment of the frame member illustrating the reinforcement material being encapsulated by the frame member of the cassette.

[0016] Figure 5 shows a top view of a cassette for positioning a reinforcement material according to an alternate embodiment of the invention.

[0017] Figure 6 shows a cross sectional view of the cassette taken along line 6-6 of Figure 5.

[0018] Figure 7 shows a top view of a cassette for positioning a reinforcement material according to yet another embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0019] Referring now to Figures 1-4, a cassette 10 is shown according to one embodiment of the invention. The cassette 10 is to be used in conjunction with a trim panel incorporating an inflatable restraint system. The cassette 10 includes a frame member, shown generally at 12, that defines an outer periphery of the cassette 10. The frame member 12 includes at least two opposing sides and is made by any conventional means, such as injection molding a semi-rigid material, such as a plastic material or the like. In the illustrated embodiment of Figure 1, the frame member 12 forms a three-sided "picture frame" structure with a fourth side including an extension area 24 and a hinge line, indicated at 26. The hinge line 26 is the approximate line along which an airbag door would bend open.

[0020] The frame member 12 may include one or more feed bars 16 extending inwardly from the frame member 12 to a substantially centrally located feed point 20 to define one or more openings 18 therebetween. The feed point 20 can be at any desired location on the cassette 10. Preferably, the feed bars 16 have a thickness less than a thickness of the frame member 12 to allow injected material that forms the trim panel to fill the openings 18. As seen from the top view of Figure 1, the cassette 10 includes four (4) feed bars 16 that define four (4) openings 18 that define an "X-shape" configuration (when viewed from the top) in which the feed bars 16 extend inwardly from each of the four corners of the frame member 12 and converge at the substantially centrally located feed point 20. It will be appreciated that other configuration are within the contemplation of the invention. For example, the feed bars 16 and the feed point 20 may define a star-shaped configuration or the like. Thus, the frame member 12, the feed bars 16 and the feed point 20 of the cassette 10 form a "spoke and hub" geometric configuration.

[0021] The main purpose of the feed bars 16 is to provide a means for locating and positioning one or more spacer lugs 28 at an appropriate location between the frame member 12 and the feed point 20. However, the invention is not limited by the number of feed bars 16 and openings 18, and that the invention can be practiced with any sufficient number of feed bars 16 and openings 18 the feed bars 16. In fact, the invention can be practiced without the use of the feed bars 16 and the feed point 20 by simply providing a pair of opposing frame members 12 having the one or more spacer lugs 28 located thereon.

[0022] One aspect of the invention is that a reinforcement material 22, such as a scrim or the like, is encapsulated by the frame member 12 for positioning the reinforcement material 22 at a predetermined location within a mold tool used to form a trim component during an injection molding operation, casting operation, or the like. Although not necessary to practice the invention, the reinforcement material 22 may also be encapsulated by the feed bars 16 and/or the spacer lugs 28. The reinforcement material 22 can be encapsulated by the frame member 12 and/or the spacer lugs 28 by overmolding material during the manufacture of the cassette 10.

[0023] In the illustrated embodiment, the reinforcement material 22 extends across the openings 18 between the frame member 12 and the feed bars 16. In addition, the reinforcement material 22 also extends across the hinge line 26 and into the extension area 24 of the cassette 10. The hinge line 26 acts as a tether or hinge during deployment of an airbag door (not shown) when the cassette 10 is used during manufacture of an instrument panel. The reinforcement material 22 and the extension area 24 may include one or more holes 30 for aligning the cassette 10 when the cassette 10 is loaded into a molding tool 50, 52. A pair of arms 32 extending from the frame member 12 may also be provided to position the reinforcement material 22 in the extension area 24. The reinforcement material 22 associated with the extension area 24 can be cut or trimmed in a separate cutting operation.

[0024] The reinforcement material 22 can be made of any design or materials known in the art including, but not limited to, metal (e.g. steel straps, steel mesh screen), plastics (e.g. thermoplastics, thermoset plastics, elastomers, plastic mesh screen,) and fibers (e.g. nylon straps, PVC coated nylon scrim, hemp, cotton, woven

or nonwoven). For example, the reinforcement material 22 can be constructed from strips of tough, strong, flexible, resilient, scrim material formed of resinous plastic fibers, such as that sold under the trademark "NYLON". In another example, the reinforcement material 22 can be made of fabric material. The reinforcement material 22 can be woven with an open weave to form a mesh-like structure.

[0025] As seen in Fig. 2, the frame member 12 and the spacer lugs 28 position the reinforcement material 22 within a mold tool 50, 52 such that the reinforcement material 22 will be positioned consistently at approximately a mid-plane of a layer 46 of material. The layer 46 of material may be used, for example, as a carrier or substrate of an interior trim panel (not shown), such as an instrument panel. The interior trim panel may be of a multi-layer or single layer construction. The cassette 10 can be entirely or partially embedded in any layer or layers of the interior trim panel. The use of the spacer lugs 28 of the cassette 10 ideally positions the reinforcement material 22 at approximately the mid-plane of the layer 46, unlike conventional methods that position the reinforcement material 22 at either the upper or lower surface of the layer 46. As a result of this mid-plane positioning the reinforcement material 22 within the layer 46, the reinforcement material 22 is positioned at an optimal location with the layer 46 to prevent fragmentation of the instrument panel upon deployment of the airbag. In addition, the cassette 10 of the invention also consistently positions the reinforcement material 22 proximate to an airbag deployment door opening to further prevent fragmentation of the instrument panel upon deployment of the airbag.

[0026] However, the invention is not limited by the location at which the reinforcement material 22 is positioned within the layer 46 of the interior trim panel, depending on the type of trim panel. For example, in a simple trim panel comprised of a single layer of material with a textured or grained surface that is visible to the occupant, the reinforcement material 22 can be positioned at a predetermined distance directly within the single layer of material of the interior trim panel. In addition, it will be appreciated that the invention is not limited by the type of molding operation for forming the trim panel, and that the invention can be practiced with any conventional manufacturing process, such as injection molding, casting, or the like.

[0027] Referring now to Figures 3 and 4, another aspect of the cassette 10 of the invention is that the combination of the frame member 12 and the layer 46 of material may be designed to form a shear plane 48 at the interface between the frame member 12 and the layer 46 of material. The purpose of the shear plane 48 is to assist in severing the layer 46 upon deployment of the airbag, thereby eliminating or reducing the need for supplemental preweakening of the layer 46 of material. One way of forming the shear plane 48 is by using non-compatible molding materials for the frame member 12 and the layer 46 of material. Another way of forming the shear plane 48 is by using compatible molding materials, but forming an incomplete bond between the molding materials. By selectively determining the relative bond strength between the frame member 12 and the layer 46 of material, the shear plane 48 will cause the layer 46 of material to tear at the interface between the frame member 12 and the layer 46 of material when a shear force is applied to the layer 46 of material, such as a shear force generated during the deployment of the airbag. As a result, the shear plane 48 will assist in severing the layer 46 of material at the interface between the layer 46 of material and the frame member 12.

[0028] As seen in Fig. 3, the relative bonding strength between the frame member 12 and the layer 46 of material can be selectively determined by a variety of factors. One factor for selectively determining the relative bonding strength between the frame member 12 and the layer 46 of material is by using a mechanical interlock, shown generally at 60. In the illustrated embodiment, the mechanical interlock 60 comprises an inwardly extending concave portion 62 and an outwardly extending convex portion 64. As a result of the mechanical interlock 60, the relative bonding strength between the layer 46 of material and the frame member 12 can be increased as compared to a frame member 12 that does not include the mechanical interlock 60, even though compatible or non-compatible materials are used for the frame member 12 and the layer 46 of material.

[0029] As mentioned above, another factor for selectively determining the bonding strength between the frame member 12 and the layer 46 of material is the type of materials used for the layer 46 of material and the frame member 12. For example, the use of non-compatible materials for the frame member 12 and the layer

46 of material will tend to weaken the relative bond strength between the frame member 12 and the layer 46 of material. On the other hand, the use of compatible materials for the frame member 12 and the layer 46 of material will tend to strengthen the relative bond strength between the frame member 12 and the layer 46 of material. However, this increase in the relative bonding strength by using compatible bonding materials can be selectively adjusted by forming an incomplete bond between the materials for the frame member 12 and the layer 46 of material during the manufacturing process for the layer 46 of material.

[0030] As described above, the shear plane 48 defines a location at which the layer 46 of material will tear or separate during deployment of the airbag. As seen in Fig. 4, the frame member 12 may also include a knife edge 54 to further assist in severing any other layers of material above the layer 46 of material upon deployment of the airbag. In addition, the knife edge 54 may be fully embedded within the layer 46 of material to assist in severing the layer 46 of material. Preferably, the knife edge 54 is located on an outer surface of the frame member 12 and substantially on a peripheral upper edge of the frame member 12. The knife edge 54 is substantially aligned with the shear plane 48 such that the knife edge 54 further assists in the separation or tearing of material located above the frame member 12. This aspect of the invention may be particularly useful in multi-layer applications. For example, when the layer 46 of material is used in an instrument panel with other layers of material, such as a foam layer, a covering layer, or the like, the knife edge 54 assists in severing or separating any such layers of material upon deployment of the airbag, thereby minimizing or eliminating the need to perform a secondary preweakening operation. As a result, the cost of manufacturing the instrument panel is significantly reduced.

[0031] It will be appreciated that the shear plane 48 may be used in conjunction with alternative methods of promoting tearing of the layers of materials of the instrument panel. Because the shear plane 48 is located proximate to the reinforcement material 22, the cassette 10 of the invention consistently positions the reinforcement material 22 proximate to the tear seam pattern for the deployment of the

airbag, thereby minimizing the fragmentation of the instrument panel upon deployment of the airbag.

[0032] As mentioned above, the cassette 10 of the invention is not limited by a particular geometric configuration. For example, a cassette 10' of the invention may comprise a "rib and backbone" geometric configuration, as shown in Figures 5 and 6. The cassette 10' includes a backbone or spine 34 and one or more ribs 36 extending laterally from the spine 34 to define openings 38 therebetween. Unlike the cassette 10, the cassette 10' does not include a frame member 12, but rather the reinforcement material 22 of the cassette 10' is encapsulated within the spine 34 and the ribs 36 by overmolding material. As a result, the cassette 10' is particularly useful in situations in which a folding of the airbag during deployment is desirable in order to minimize damage to the windscreen (not shown) or other parts of the vehicle. Specifically, the laterally extending ribs 36 provide a flexible support structure for the reinforcement material 22 that promotes folding of the cassette 10' without complete separation of the cassette 10'.

[0033] As seen in Figure 6, similar to the cassette 10, the cassette 10' can consistently position the reinforcement material 22 at any desirable predetermined location within the layer 46 of material, such as a carrier or substrate material, of an interior trim panel. In the illustration of Figure 6, the reinforcement material 22 is located proximate to the mold 52 and farthest from the mold 50 such that the reinforcement material 22 is located toward an interior surface or "B" surface of the layer 46 of material when the interior trim panel is installed. By ensuring consistently positioning the reinforcement material 22 proximate to the layer of material 40 forming the "B" surface of the interior trim panel, "read-through" of the reinforcement material 22 through the opposite surface or "A" surface is minimized.

[0034] As described above, the cassette 10, 10' of the invention can consistently position the reinforcement material 22 at a predetermined location within the layer 46 of material forming an interior trim panel. In the case where the interior trim panel is an instrument panel, the cassette 10, 10' can consistently position the reinforcement material 22 within the region defining the airbag door such that the reinforcement

material 22 is consistently positioned proximate to the tear seam pattern that assists in the deployment of the airbag.

[0035] It will be appreciated that the cassette 10, 10' of the invention can also be utilized to consistently position the reinforcement material 22 in a region outside the airbag door opening, but proximate to the tear seam pattern to further assist in minimizing fragmentation of the interior trim panel upon deployment of the airbag. It is contemplated by the inventor of the present invention that positioning the reinforcement material 22 proximate to the tear seam pattern outside the airbag door opening can be accomplished in a variety of different ways.

[0036] Referring now to Figure 7, a cassette 100 according to an alternative embodiment of the invention. The cassette 100 comprises a "frame within a frame" construction and includes an inner cassette member, shown generally at 70, and an outer cassette member, shown generally at 80. In the illustrated embodiment, the inner cassette member 70 is substantially identical to the cassette 10 described above. However, it will be appreciated that the invention is not limited by the configuration of the inner cassette member 70, and that the invention can be practiced with other configurations. For example, the inner cassette member 70 can comprise the cassette 10' as described above.

[0037] The outer cassette member 80 includes an inner frame member 82 and an outer frame member 84. The reinforcement material 22 is secured between the inner and outer frame members 82, 84 by overmolding material when forming the frame members 82, 84, similar to the manner in which the reinforcement material 22 is secured to the frame member 12 of the cassette 10. The inner and outer frame members 82, 84 may include ~~one or more spacer~~ lugs 28 to position the reinforcement material 22 at a predetermined location within the layer 46 of the trim panel, similar to the cassette 10.

[0038] One aspect of the cassette 100 of the invention is that the reinforcement material 22 is positioned not only at a predetermined location within the layer 46 within the airbag door, but also outside of a tear seam 90 to prevent or eliminate fragmentation of the trim panel upon deployment of the airbag. It should be noted that the tear seam 90 can be located at the intersection of the frame member 12 of the inner

cassette member 70 and the layer 46 of material, or at the intersection of the inner frame member 82 of the outer cassette member 80 and the layer 46 of material by the using the shear plane 48 as described above. Alternatively, the tear seam 90 can be located between the frame member 12 of the inner cassette member 70 and the inner frame member 82 of the outer cassette member 80 without the use of the shear plane 48, as shown in Figure 7.

[0039] As described above, the reinforcement material 22 provides reinforcement and prevents fragmentation of the trim panel during the deployment of the airbag door by being located within and proximate to the area defining the opening for the deployment of the airbag door. In addition, the reinforcement material 22 can be located both within and outside the area defining the opening for the deployment of the airbag door to provide additional prevention of the fragmentation of the trim panel. Further, the shear plane 48 can be positioned to provide any desirable preweakening tear seam pattern. For example, the shear plane 48 can be in a star-shape pattern, or the like. However, it will be appreciated that the invention can be practiced with or without the shear plane 48 to assist in the deployment of the airbag door.

[0040] While the invention has been specifically described in connection with certain specific embodiments thereof, it is to be understood that this is by way of illustration and not of limitation, and the scope of the appended claims should be construed as broadly as the prior art will permit.

CLAIMS

1. A cassette for positioning a reinforcement material within an interior trim panel, comprising:
 - 5 a frame member; and
 - a reinforcement material secured by said frame member such that said reinforcement material is positioned at a predetermined location within a mold tool, wherein the reinforcement material is consistently positioned at the predetermined location during manufacture of an interior trim panel.
- 10 2. The cassette of claim 1, further comprising a shear plane located at an intersection of the frame member and a layer of material of the interior trim panel.
3. The cassette of claim 2, further comprising a knife edge on the frame
15 member.
4. The cassette of any one of the preceding claims, further comprising at least one spacer lug for positioning the reinforcement material at the predetermined location within the layer of the interior trim panel.
- 20 5. The cassette of any one of the preceding claims, wherein the frame member includes two opposing sides, and wherein the reinforcement material is secured to the two opposite sides of the frame member.
- 25 6. The cassette of any one of the preceding claims, further comprising an outer cassette member for positioning reinforcement material outside a tear seam of the trim panel.
7. An interior trim panel, comprising:
 - 30 a layer of material, and
 - a cassette disposed within the layer of material, the cassette including a frame

member and a reinforcement material encapsulated by the frame member,
wherein the reinforcement material is positioned at a predetermined location
within the layer of material.

5 8. The interior trim panel of claim 7, further comprising a shear plane defined at
an interface between the frame member and the layer of material.

9. The interior trim panel of claim 7 or claim 8, wherein the cassette further
comprises at least one spacer lug for positioning the reinforcement material.

10

10. The interior trim panel of any one of claims 7 to 9, wherein the frame member
includes two opposing sides, and wherein the reinforcement material is secured to the
two opposite sides of the frame member.

15 11. A cassette for positioning a reinforcement material within a trim panel, the
cassette being substantially as described herein with reference to the accompanying
drawings.

12. An interior trim panel, the panel being substantially as described herein with
20 reference to the accompanying drawings.

**APPARATUS AND METHOD FOR POSITIONING REINFORCEMENT
MATERIAL WITHIN AN INTERIOR TRIM PANEL**

ABSTRACT OF THE DISCLOSURE

A cassette (10, 10') includes a frame member (12) for consistently locating a reinforcement material (22), such as a scrim, at a predetermined position within a layer (46) of material of a trim panel. The reinforcement material (22) is secured to the frame member (12) by overmolding material when manufacturing the frame member (12). The reinforcement material (22) is positioned at a predetermined location within the layer (46) of material by the use of one or more spacer lugs (28). A shear plane (48) can be formed at an intersection between the frame member (12) and layer (46) of material to assist in severing the trim panel along a tear seam (90) without the need to preweaken the trim panel in a secondary operation, such as by laser scoring, or the like. The frame member (12) may also include a knife edge (54) to assist in severing the trim panel. In an alternate embodiment, a cassette (100) can position the reinforcement material (22) on both sides of the tear seam (90) to prevent fragmentation of the trim panel upon deployment of an airbag.

R0202856.DOC

(Fig 1)

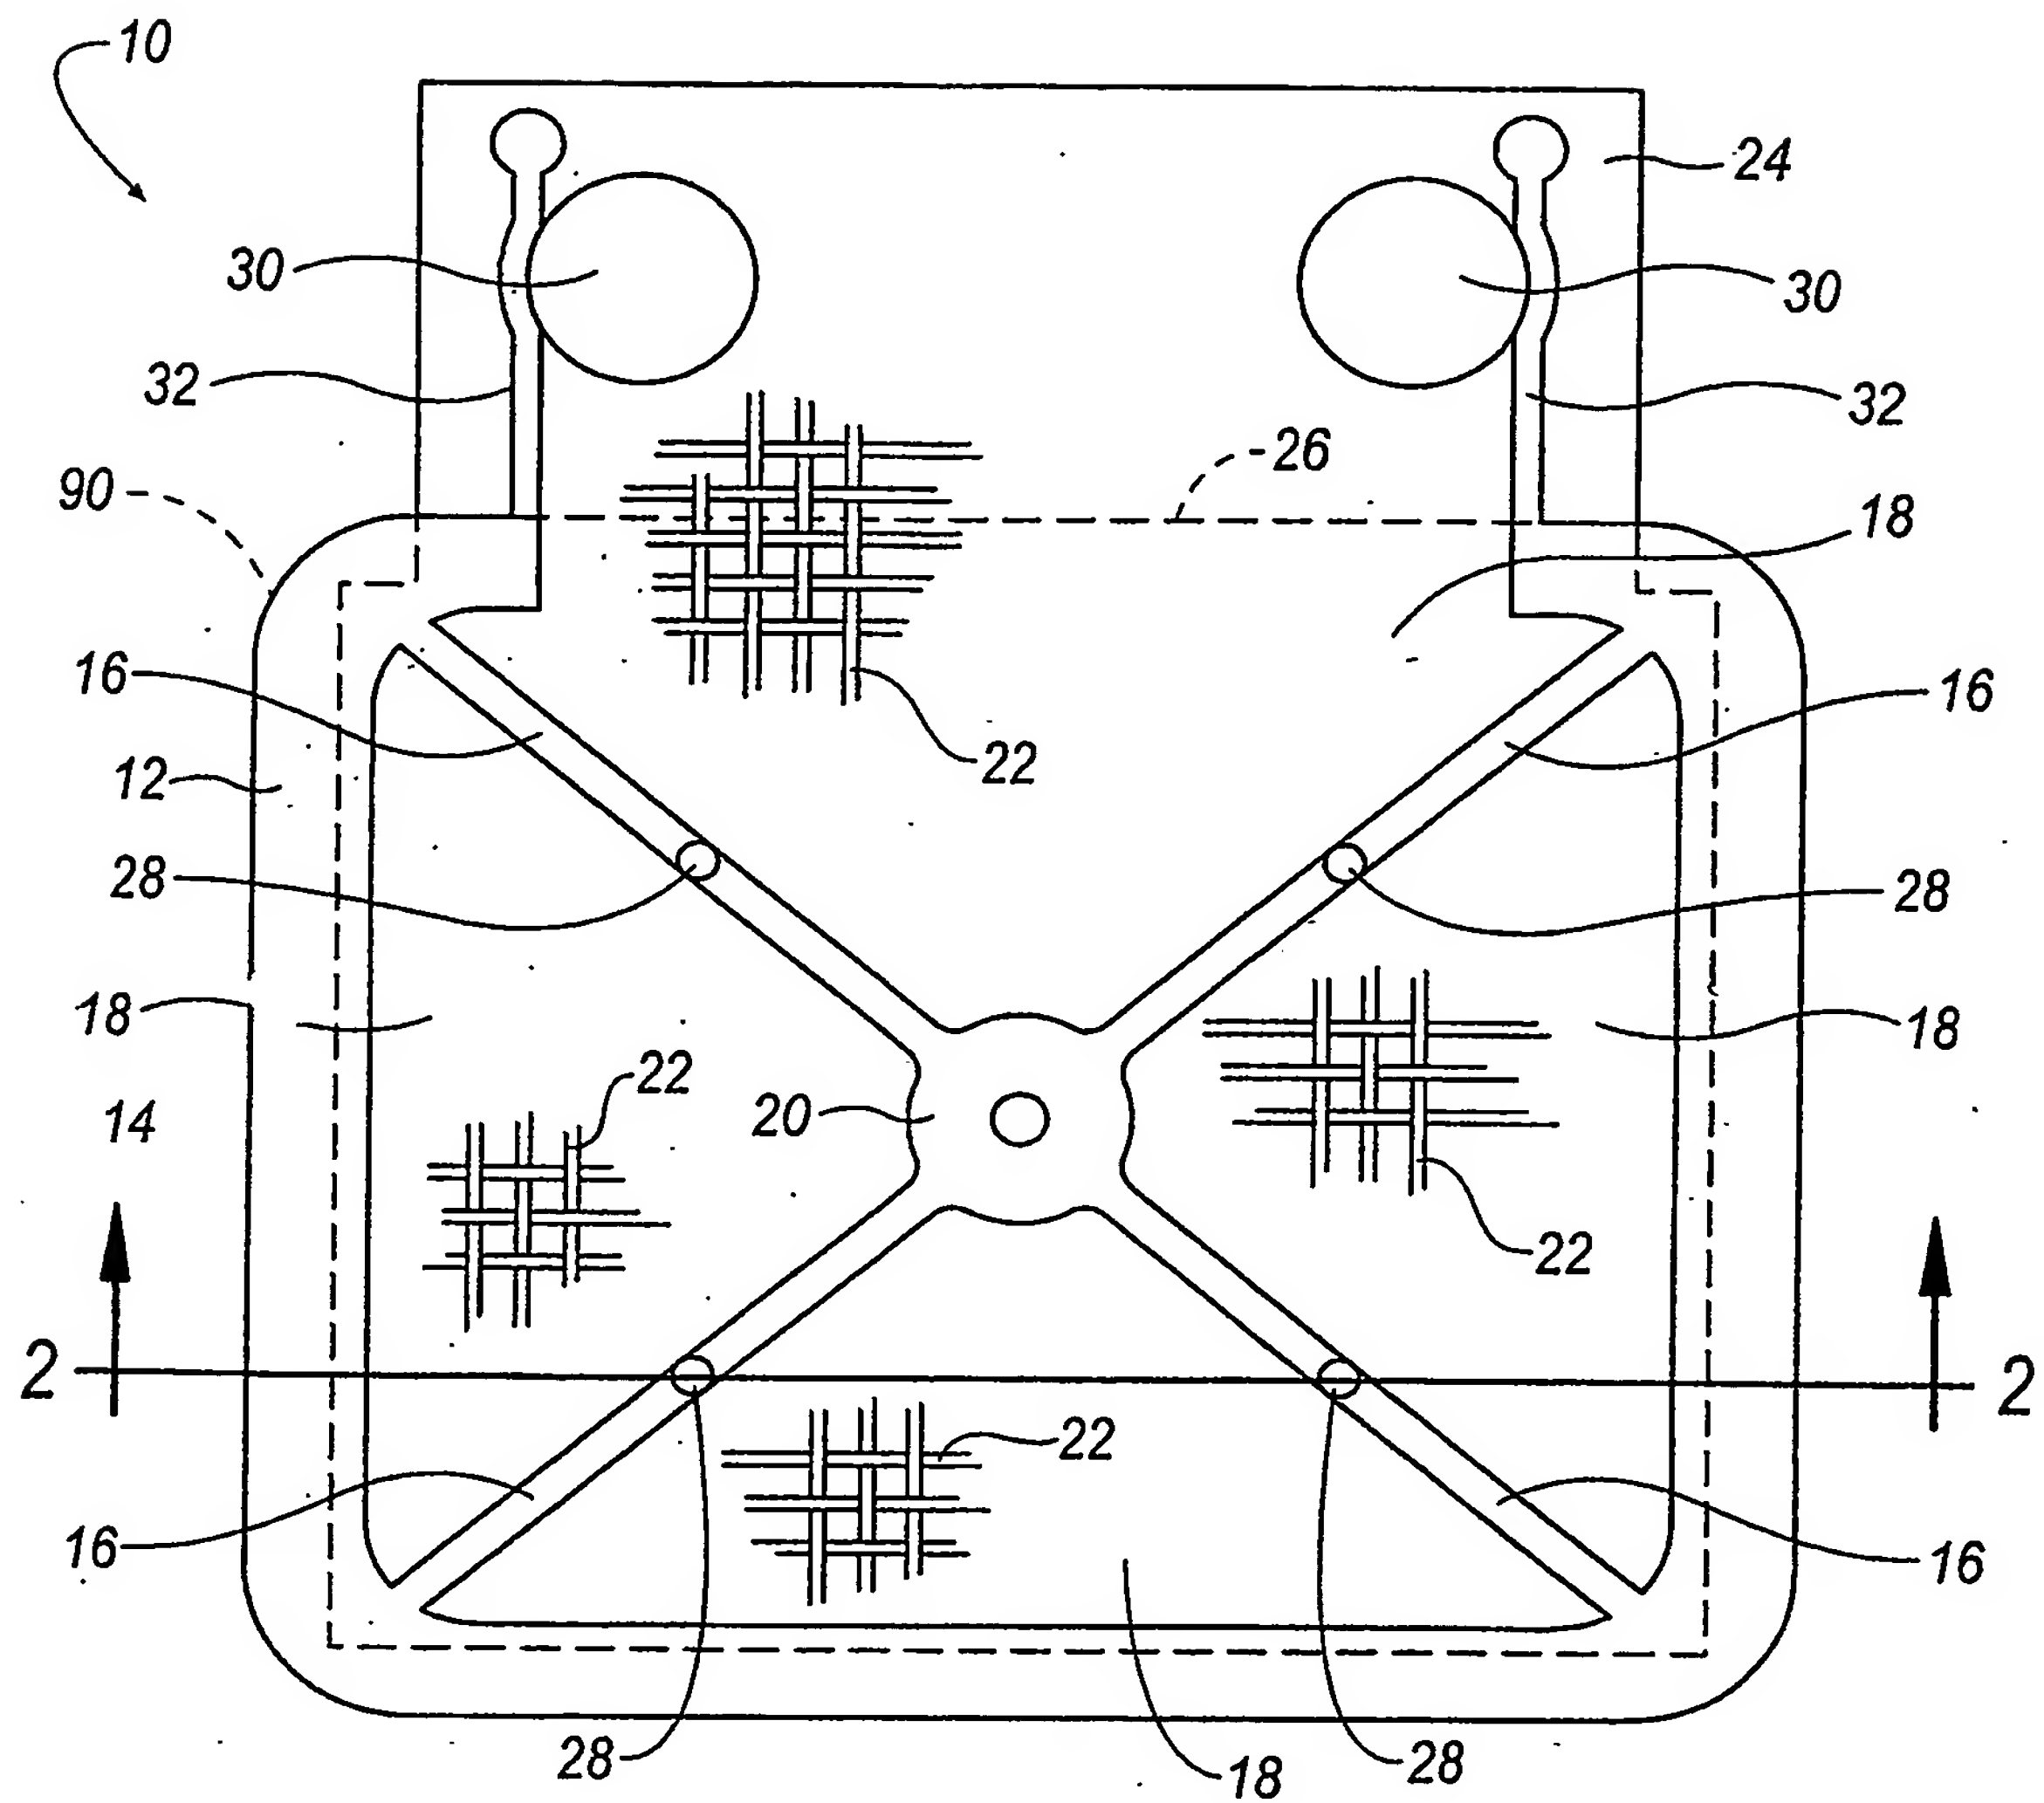


FIG. 1

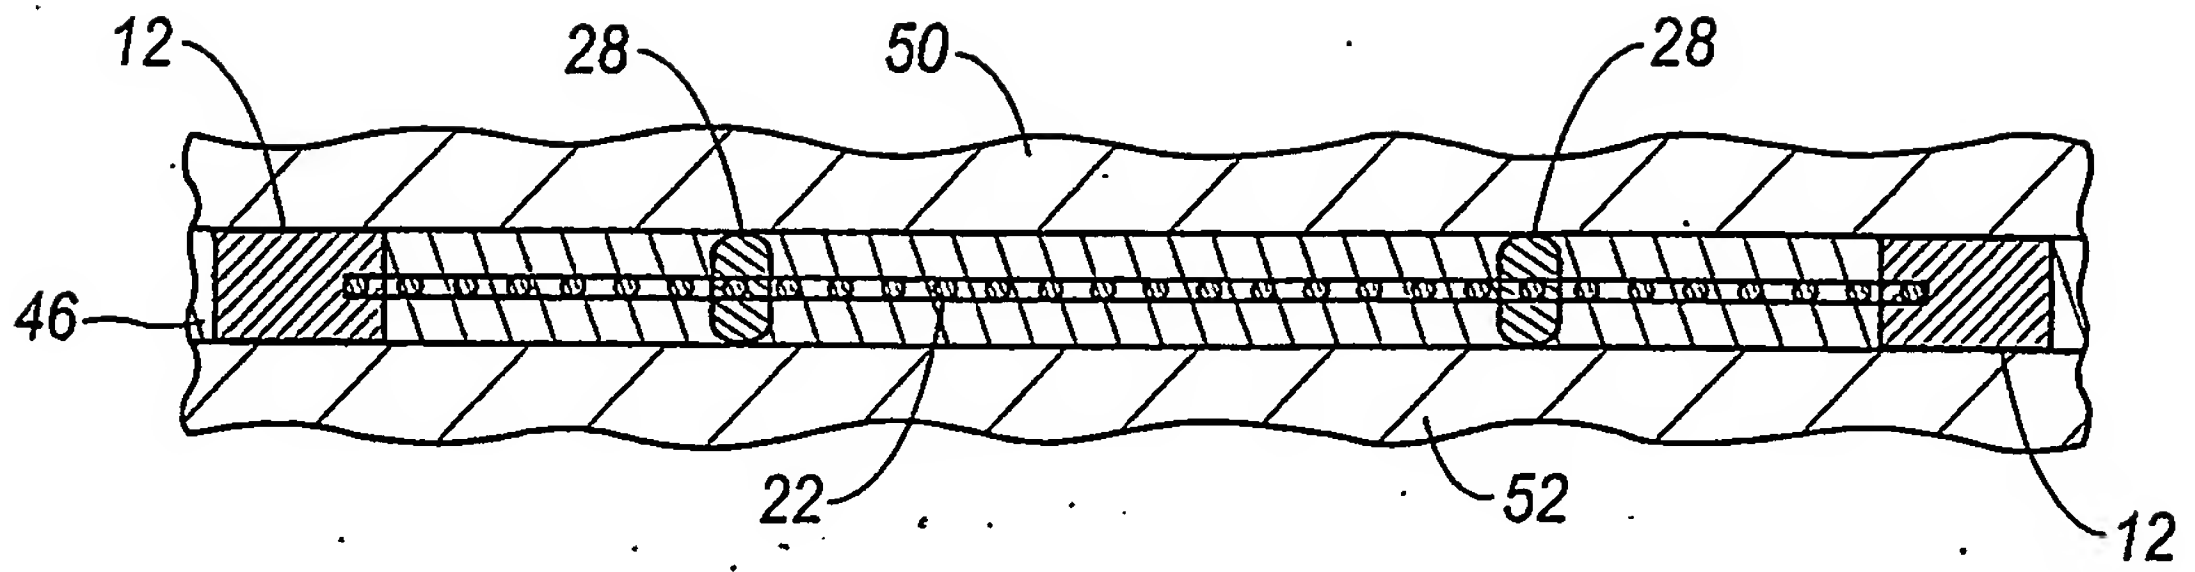


FIG. 2

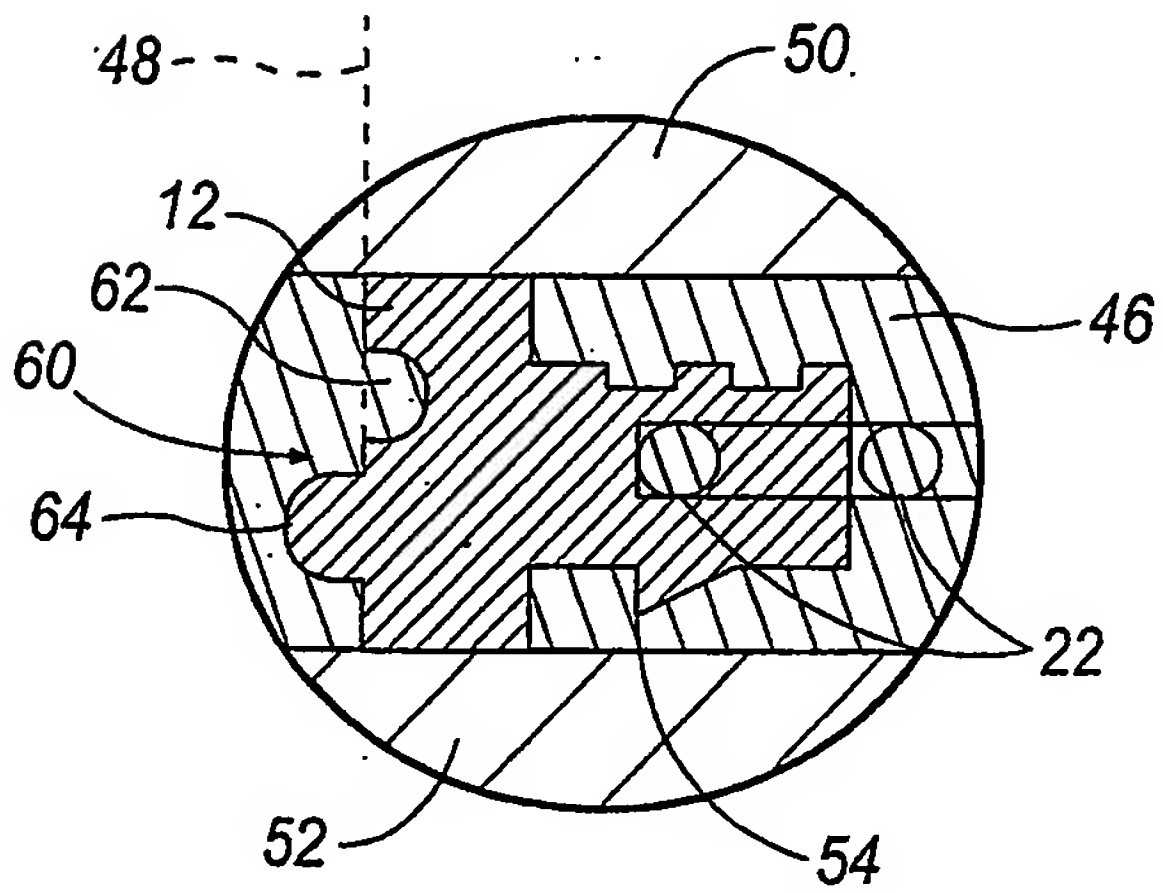


FIG. 3

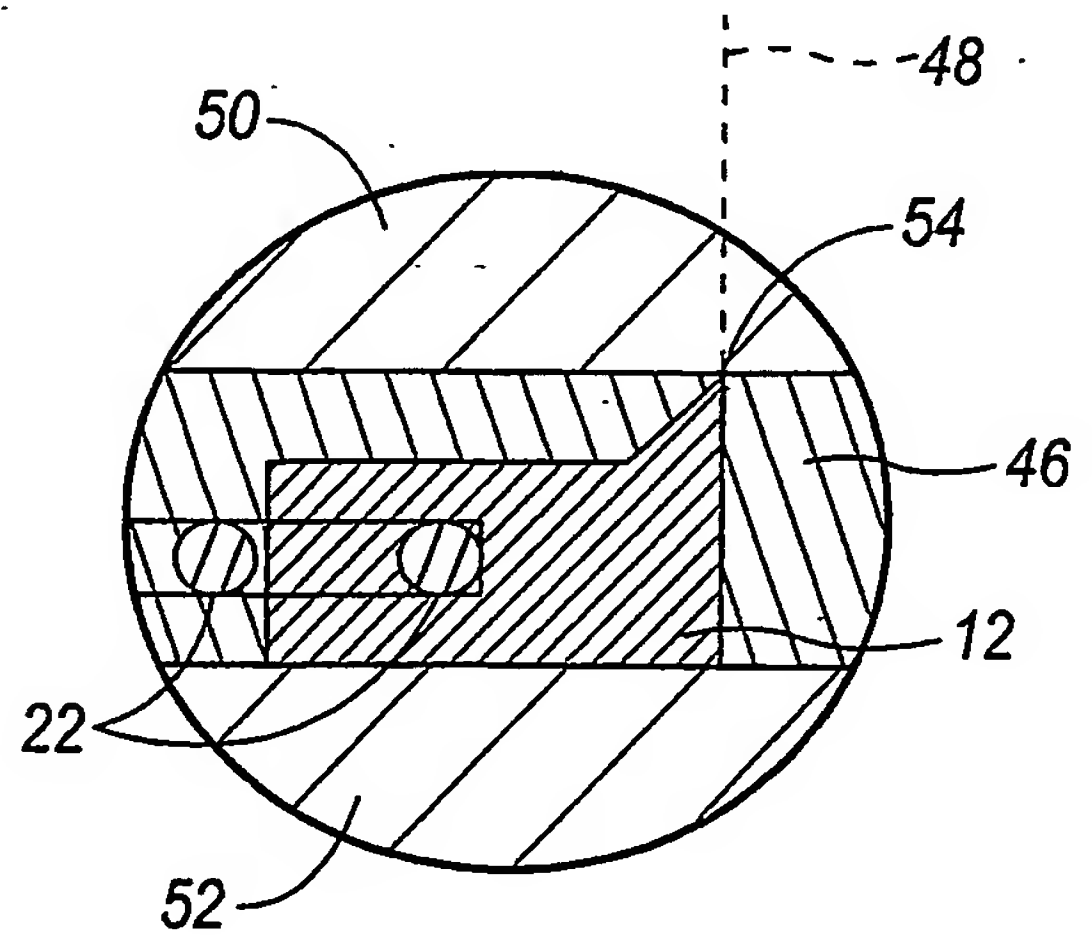


FIG. 4

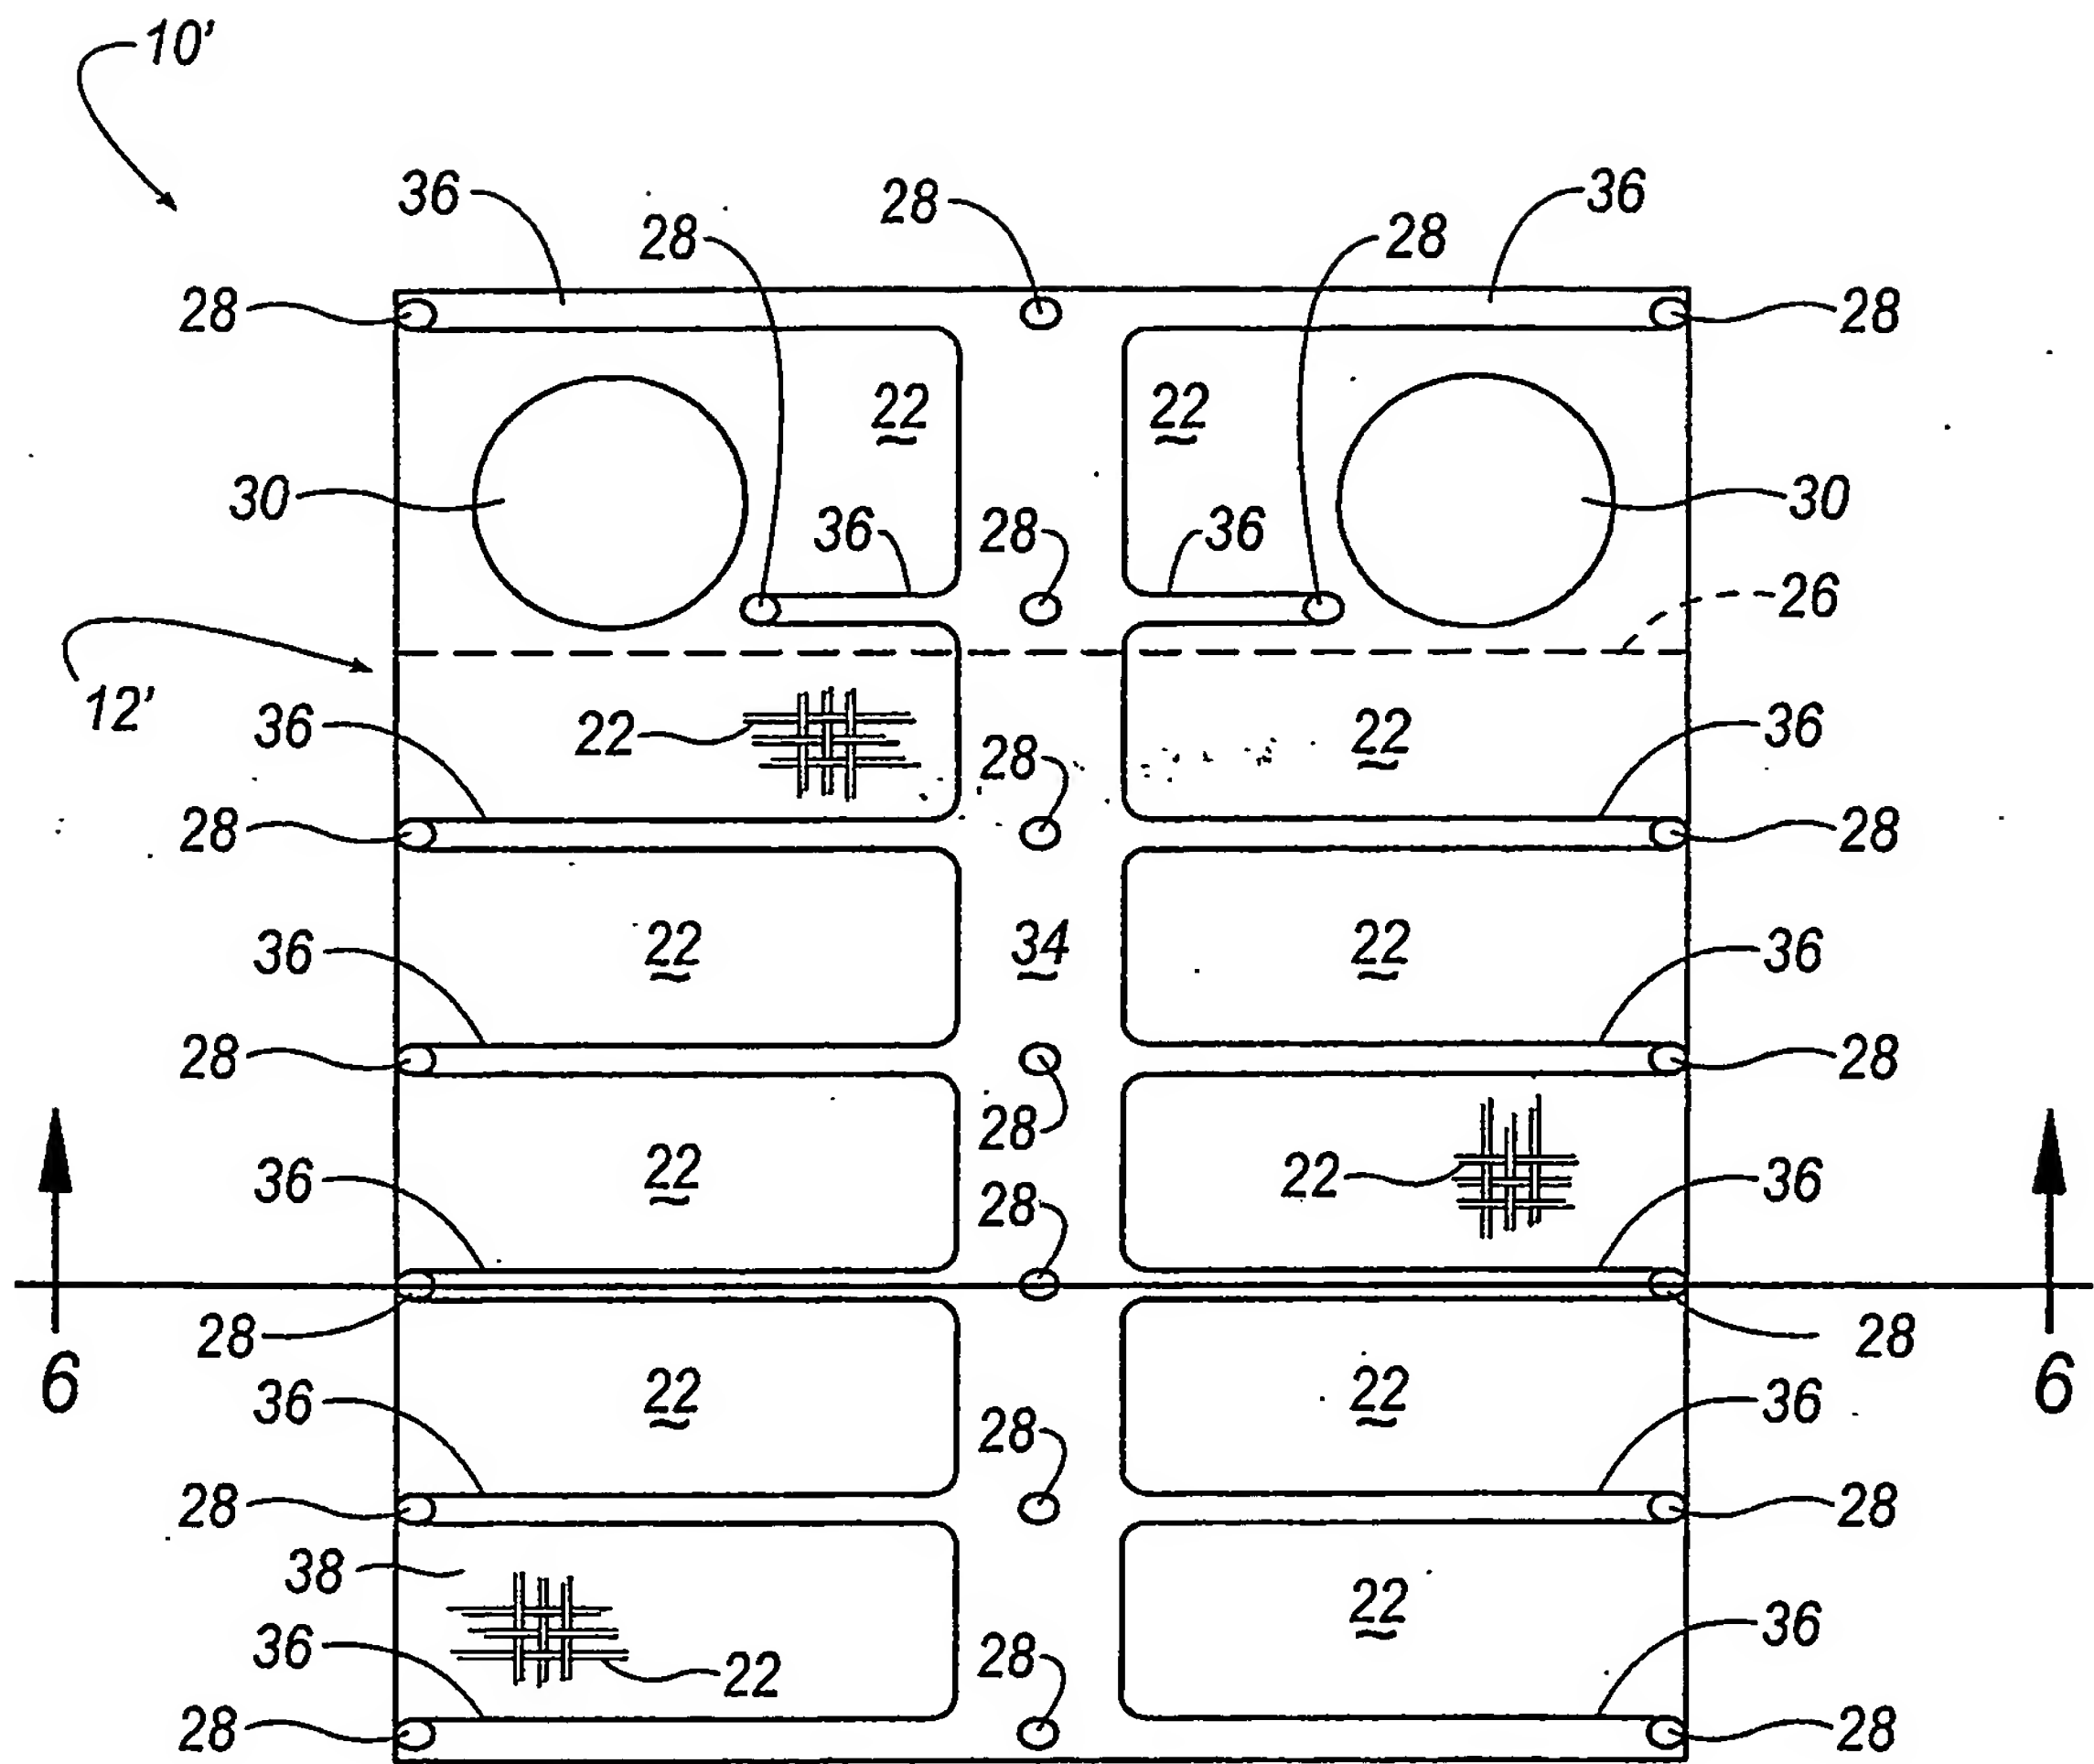


FIG. 5

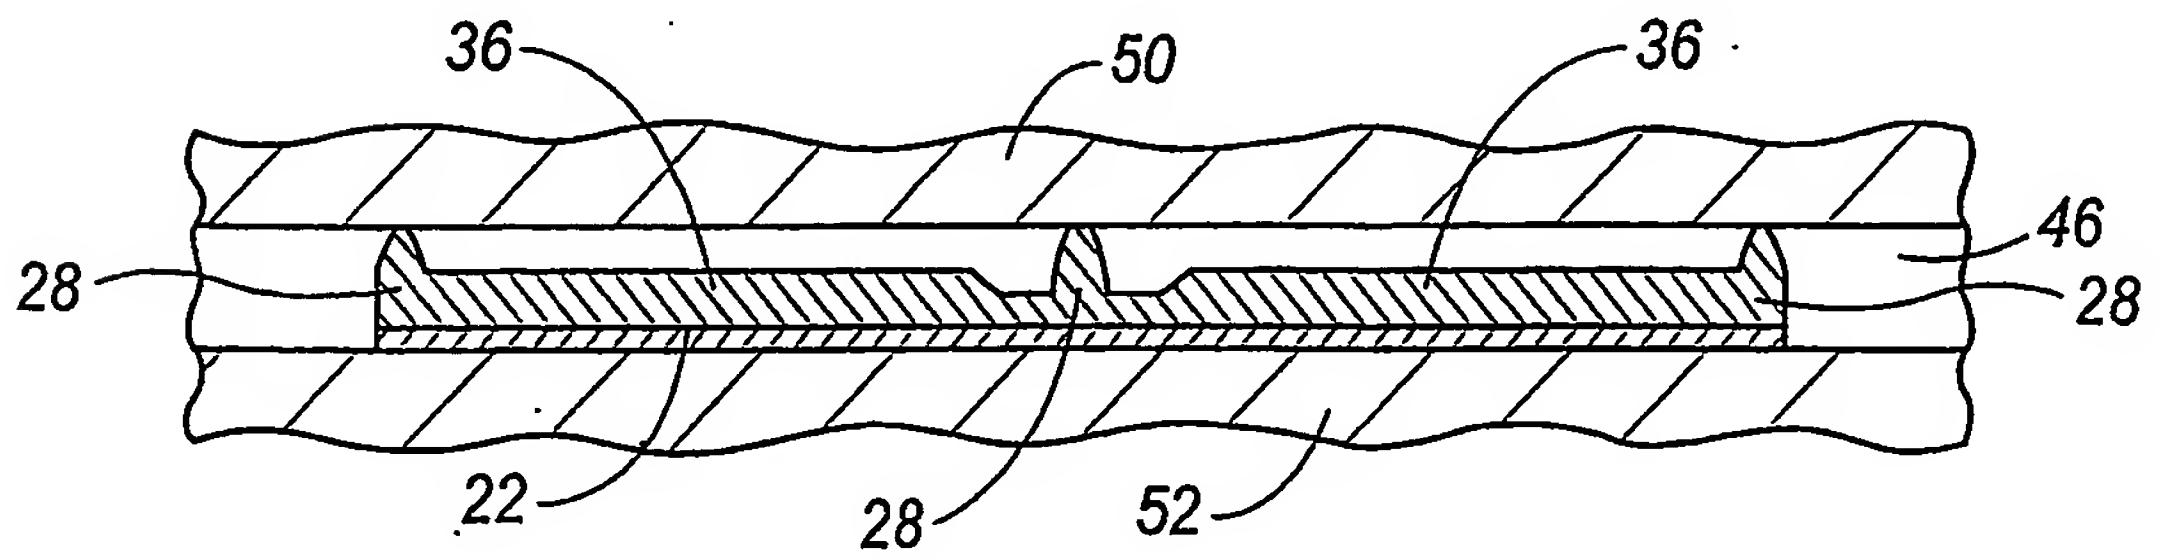


FIG. 6

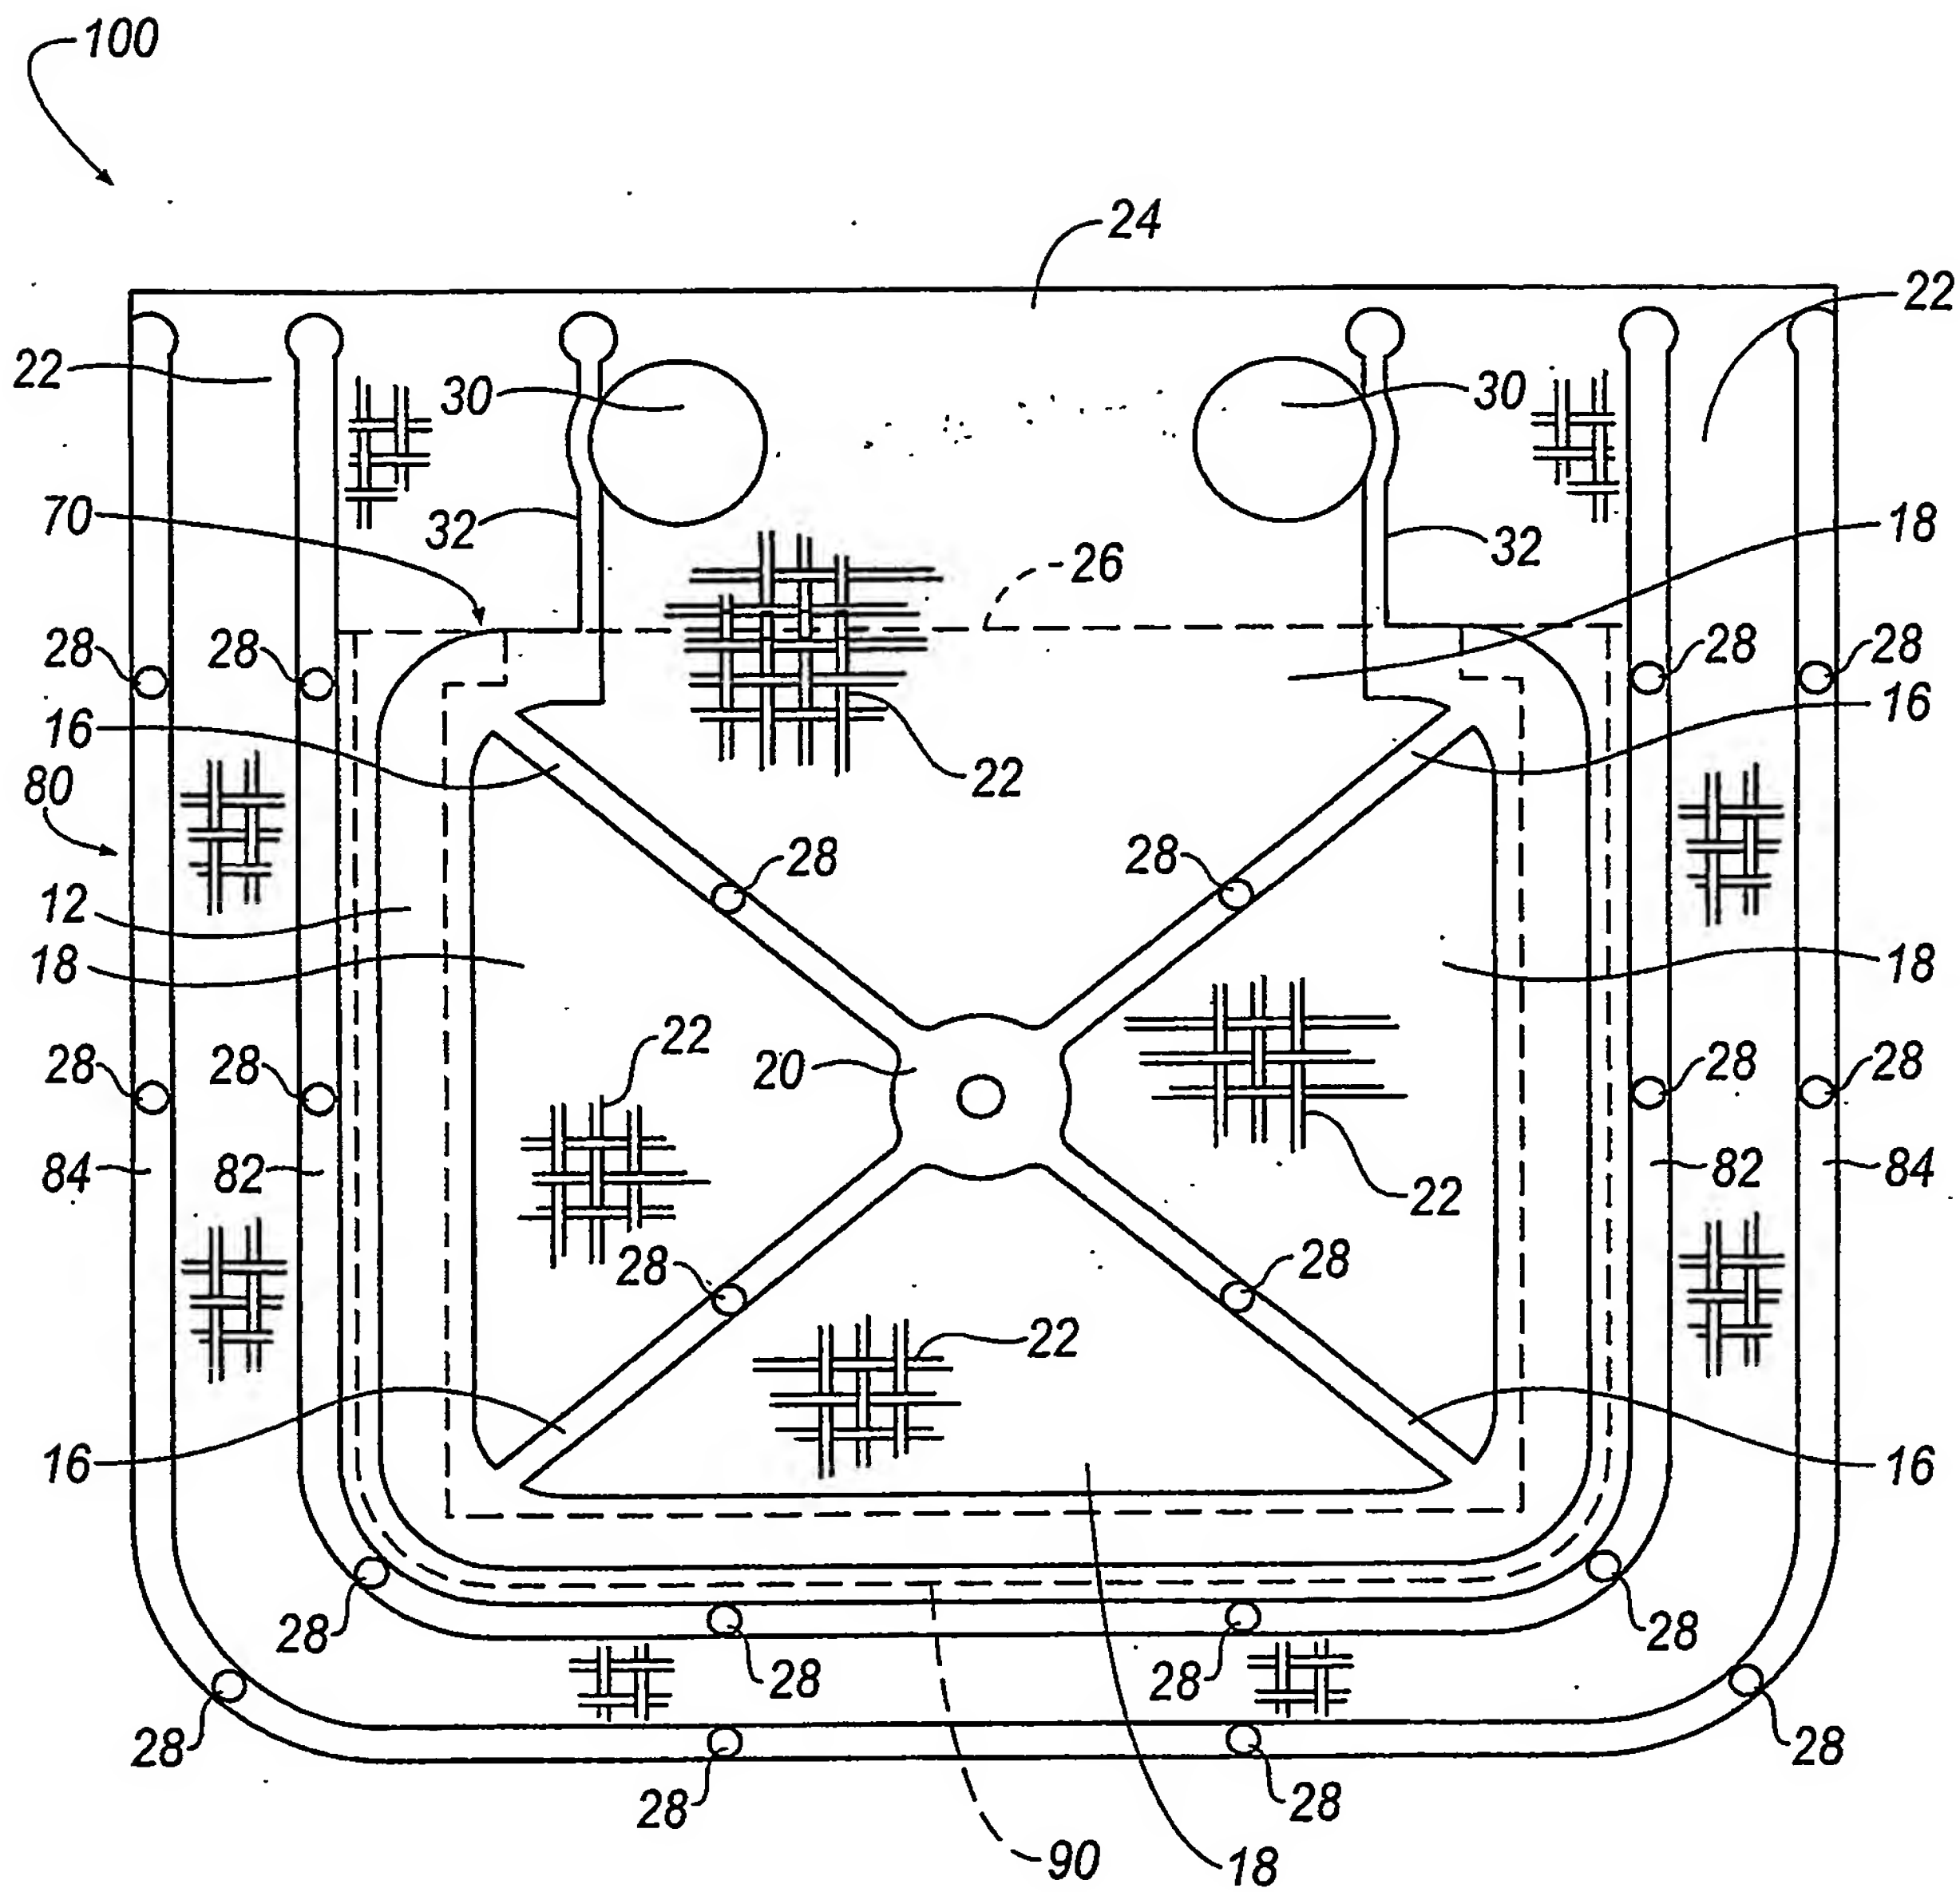


FIG. 7

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.